


- Tube Fitting (Double Ferrule)-
Tube To Male Pipe Thread



Positionable Male Run Tee

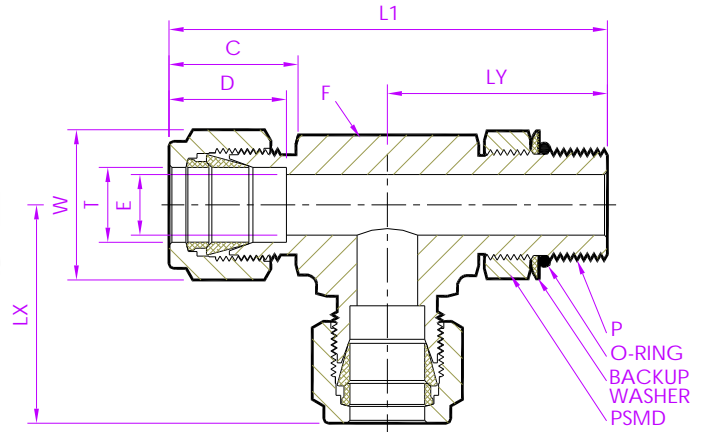

Fractional Tube x ISO Parallel (M)

TubeFit Part No.	Equivalent Part No. Type 1	Equivalent Part No. Type 2	TUBE OD Ø T	ISOP Male Pipe Size P	ØE	D	C	L1	LY	LX	Body Hex F	Nut Hex W
Dimensions in Inches												
4 - PMRTD - 2IP	- 400 - 3 - 2TRT	4MRT2R	1/4	1/8	0.16	0.60	0.70	2.10	1.04	1.06	9/16	9/16
4 - PMRTD - 4IP	- 400 - 3 - 4TRT	4MRT4R		1/4	0.19			2.41	1.27	1.14	3/4	
6 - PMRTD - 4IP	- 600 - 3 - 4TRT	6MRT4R	3/8	1/4	0.23	0.66	0.76	2.47	1.27	1.20	3/4	11/16
8 - PMRTD - 6IP	- 810 - 3 - 6TRT	8MRT6R	1/2	3/8	0.31	0.90	0.86	2.88	1.46	1.42	7/8	7/8
8 - PMRTD - 8IP	- 810 - 3 - 8TRT	8MRT8R		1/2	0.41			3.21	1.71	1.50	1.1/16	
10 - PMRTD - 8IP	- 1010 - 3 - 8TRT	10MRT8R	5/8	1/2	0.47	0.96	0.86	3.21	1.71	1.50	1.1/16	1
12 - PMRTD - 12IP	- 1210 - 3 - 12TRT	12MRT12R	3/4	3/4	0.62	0.96	0.86	3.49	1.92	1.57	1.1/4	1.1/8
12 - PMRTD - 8IP	- 1210 - 3 - 8TRT	12MRT8R		1/2	0.47			3.35	1.78	1.57	1.1/16	
16 - PMRTD - 16IP	- 1610 - 3 - 16TRT	16MRT16R	1	1	0.78	1.23	1.04	4.04	2.11	1.93	1.3/8	1.1/2

NOTE: 1)The E Dimension is the minimum opening & Fittings of this group may be back drilling to lager ID at pipe thread or straight thread end.
2)Dimension L1, C, D is shown in the finger-tight position. 3)Dimensions are for reference only and are subject to change 4)ISO (BSP Parallel) thread as per BS 2779.
- ALL PART NUMBERS ARE PROPRIETARY OF THEIR RESPECTIVE OWNERS. -