


- Tube Fitting (Double Ferrule)-  
Tube To Male Pipe Thread

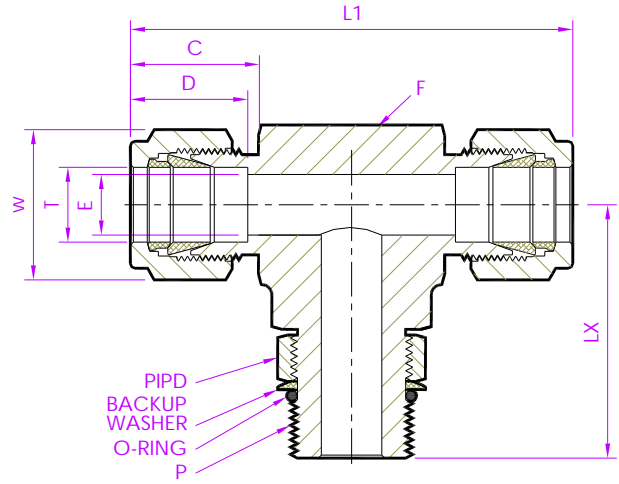

# Positionable Male Branch Tee

Fractional Tube x ISO Parallel (M)

Tubefit Part No.	Equivalent Part No. Type 1	Equivalent Part No. Type 2	TUBE OD Ø T	ISOP Male Pipe Size P	ØE	D	C	L1	LX	Body Hex F	Nut Hex W
Dimensions in Inches											
4 - PMBTD - 2IP	- 400 - 3 - 2TTR	4MBT2R	1/4	1/8	0.16	0.60	0.70	2.12	1.04	9/16	9/16
4 - PMBTD - 4IP	- 400 - 3 - 4TTR	4MBT4R		1/4	0.19			2.28	1.27	5/8	
6 - PMBTD - 4IP	- 600 - 3 - 4TTR	6MBT4R	3/8	1/4	0.20	0.66	0.76	2.40	1.27	5/8	11/16
8 - PMBTD - 6IP	- 810 - 3 - 6TTR	8MBT6R	1/2	3/8	0.31	0.90	0.86	2.84	1.46	7/8	7/8
8 - PMBTD - 8IP	- 810 - 3 - 8TTR	8MBT8R		1/2	0.41			3.00	1.71	15/16	
10 - PMBTD - 8IP	- 1010 - 3 - 8TTR	10MBT8R	5/8	1/2	0.47	0.96	0.86	3.00	1.71	15/16	1
12 - PMBTD - 12IP	- 1210 - 3 - 12TTR	12MBT12R	3/4	3/4	0.62	0.96	0.86	3.14	1.92	1.1/16	1.1/8
12 - PMBTD - 8IP	- 1210 - 3 - 8TTR	12MBT8R		1/2	0.47			3.14	1.78	1.1/16	
16 - PMBTD - 16IP	- 1610 - 3 - 16TTR	16MBT16R	1	1	0.78	1.23	1.04	3.86	2.11	1.3/8	1.1/2

NOTE: 1)The E Dimension is the minimum opening & Fittings of this group may be back drilling to lager ID at pipe thread or straight thread end.  
2)Dimension L1, C, D is shown in the finger-tight position. 3)Dimensions are for reference only and are subject to change 4)ISO Parallel (BSPP) thread as per BS 2779.

- ALL PART NUMBERS ARE PROPRIETARY OF THEIR RESPECTIVE OWNERS. -