


**- Tube Fitting (Double Ferrule)-
Tube To Female Pipe Thread**

Female Run Tee

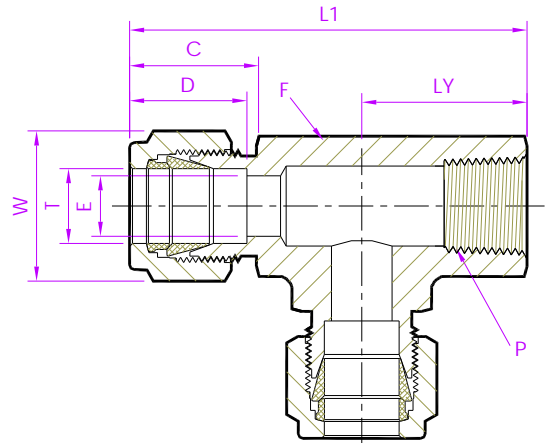

Fractional Tube x NPT (F)

Tubefit Part No.	Equivalent Part No. Type 1	Equivalent Part No. Type 2	TUBE OD Ø T	NPT Female Pipe Size P	ØE	D	C	L1	LY	Body Hex F	Nut Hex W
Dimensions in Inches											
2 - FRTD - 2N	- 200 - 3 - 2TFT	2FRT2N	1/8	1/8	0.09	0.50	0.60	1.72	0.75	9/16	7/16
3 - FRTD - 2N	- 300 - 3 - 2TFT	3FRT2N	3/16	1/8	0.12	0.54	0.63	1.76	0.75	9/16	1/2
4 - FRTD - 2N	- 400 - 3 - 2TFT	4FRT2N	1/4	1/8	0.19	0.60	0.70	1.81	0.75	9/16	9/16
4 - FRTD - 4N	- 400 - 3 - 4TFT	4FRT4N		1/4	0.19			2.05	0.88	3/4	
5 - FRTD - 2N	- 500 - 3 - 2TFT	5FRT2N	5/16	1/8	0.25	0.64	0.73	1.92	0.75	5/8	5/8
6 - FRTD - 4N	- 600 - 3 - 6TFT	6FRT4N	3/8	1/4	0.28	0.66	0.76	2.11	0.88	3/4	11/16
8 - FRTD - 4N	- 810 - 3 - 4TFT	8FRT4N	1/2	1/4	0.41	0.90	0.86	2.56	1.13	7/8	7/8
8 - FRTD - 6N	- 810 - 3 - 6TFT	8FRT6N		3/8	0.41			2.30	0.88	7/8	
8 - FRTD - 8N	- 810 - 3 - 8TFT	8FRT8N		1/2	0.41			2.69	1.12	1.1/16	
10 - FRTD - 8N	- 1010 - 3 - 8TFT	10FRT8N	5/8	1/2	0.50	0.96	0.86	2.66	1.13	1.1/16	1
12 - FRTD - 12N	- 1210 - 3 - 12TFT	12FRT12N	3/4	3/4	0.62	0.96	0.86	3.01	1.25	1.1/4	1.1/8
14 - FRTD - 8N	- 1410 - 3 - 8TFT	14FRT8N	7/8	1/2	0.72	1.02	0.86	3.01	1.25	1.1/4	1.1/4
14 - FRTD - 12N	- 1410 - 3 - 12TFT	14FRT12N		3/4	0.72			3.01	1.25	1.1/4	
16 - FRTD - 12N	- 1610 - 3 - 12TFT	16FRT12N	1	3/4	0.88	1.23	1.04	3.18	1.25	1.3/8	1.1/2
16 - FRTD - 16N	- 1610 - 3 - 16TFT	16FRT16N		1	0.88			3.61	1.50	1.11/16	

NOTE : 1)The E Dimension is the minimum opening. 2)Dimension L1, C, D is shown in the finger-tight position.
3)Dimensions are for reference only and are subject to change 4)NPT thread as per ANSI B 1.20.1.